


Beam Take Down – Disassembly

1. Disconnect the power plug from the power source.
2. Slide the projector cart down the beam to eye level.
3. Remove the cord covers.
4. Disconnect the power plug from the projector.
5. Make sure that the projector is not covering the joint of the beam.
6. Turn the projector 180 degrees clockwise so the lens is facing the ceiling pad.
7. Remove the projector and place it on a flat surface out of the way.
8. Press down on the beam to depress the spring loaded foot and tilt the beam to the side.
9. Put the beam on a table or on the floor
10. Loosen the base knob.
11. Slide the telescoping piece into the lower beam.
12. Tighten the base knob.
13. Push and turn to loosen the center knob until it pops up and turns freely. Note that the knob remains connected to the beam.
14. Pull the two beam sections apart.

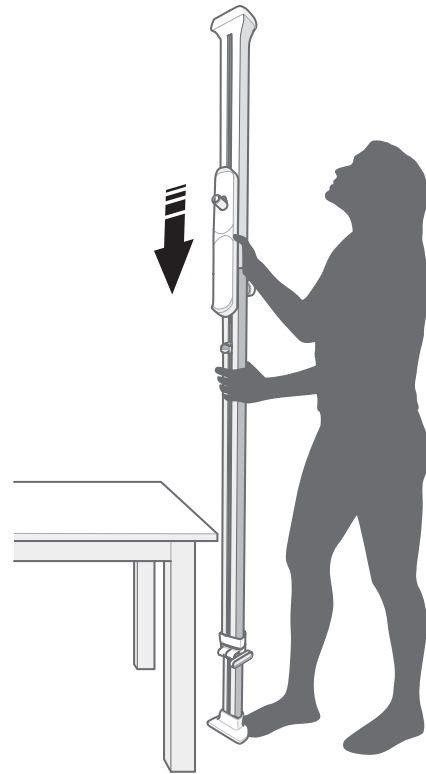

To Store the Product

- Before storage, let the projector cool completely.
- Disconnect the power adapter from the projector during storage.
- Attach the cord covers to the beam during storage.
- Preferably store the product in mounted position set up at the work area. Alternatively store the product leaning against the wall in a storage area with the projector detached.
 - The telescoping section can be locked in compressed position, if needed.
- Store the product indoors and at room temperature.